

JIERUI

高品质液压软管



符合国际通用标准

Meets international standards

RE 3011 EN 853 1SN

RE 3021 EN 853 2SN

RE 3211 EN 857 1SC

RE 3221 EN 857 2SC

软管重量更轻

Lighter in weight

产品尺寸稳定

Stable size

符合国际通用标准

Meets international standards



大连捷瑞流体控制股份有限公司
DALIAN JIERUI FLUID CONTROL CO.,LTD.

地址/Add: 中国大连市甘井子区辛萍街51号
NO.51 Xinping Street,Ganjingzi District, Dalian, China

电话/Tel: 0411-6600 7987

传真/Fax: 0411-8630 1511


<http://www.dljierui.com>



RE 3011

符合 EN853 1SN

Meets EN853 1SN

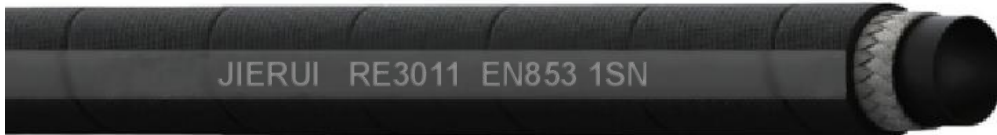

型号	公称口径		内径		外径		最大工作压力		爆破压力		最小弯曲半径
Part No.	DN	NB	I.D.		O.D.		Max.Working pressure		Min.Burst pressure		Min.bend radius
	mm	inch	mm	inch	mm	inch	bar	psi	bar	psi	mm
RE3011-03	5	3/16	5.0	0.20	11.9	0.47	250	3625	1000	14500	90
RE3011-04	6	1/4	6.5	0.26	13.7	0.54	225	3263	900	13050	100
RE3011-05	8	5/16	8.0	0.31	15.3	0.6	215	3118	850	12325	115
RE3011-06	10	3/8	9.5	0.37	17.6	0.69	180	2610	720	10440	130
RE3011-08	12	1/2	12.7	0.50	20.7	0.81	160	2320	640	9280	180
RE3011-10	16	5/8	15.8	0.62	23.9	0.94	130	1885	520	7540	200
RE3011-12	19	3/4	19.0	0.75	28	1.1	105	1523	420	6090	240
RE3011-16	25	1	25.4	1.00	35.8	1.41	88	1276	350	5075	300
RE3011-20	31	1-1/4	32.0	1.26	43.2	1.7	63	914	250	3625	420
RE3011-24	38	1-1/2	38.1	1.51	50.1	1.97	50	725	200	2900	500
RE3011-32	51	2	51.0	2.01	64.5	2.54	40	580	160	2320	630



合成橡胶内层，一层钢丝
编织增强层，合成橡胶外层

Synthetic rubber tube, single
wire braid reinforcement,
and synthetic rubber cover.



工作温度范围-40C°-100C°

Operating Temperature Range:
-40C°-100C°



推荐使用介质适于输送液压流体如醇、
液压油、燃油、润滑油、乳化液、烃等

Application:
fluid transfer, such as alcohols,
hydraulic oils, fuel, lubricating oils,
emulsified liquid, hydrocarbon, and etc.




联系大连捷瑞流体控制股份有限公司获取更多信息
For more information, please contact JIERUI



RE 3021

符合 EN853 2SN

Meets EN853 2SN

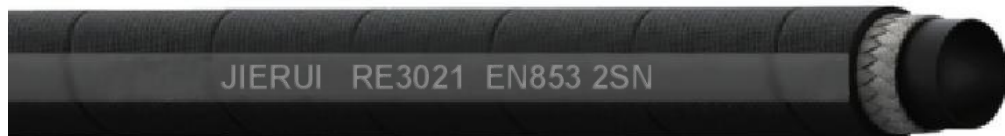

型号	公称通径		内径		外径		最大工作压力		爆破压力		最小弯曲半径
Part No.	DN	NB	I.D.		O.D.		Max.Working pressure		Min.Burst pressure		Min.bend radius
	mm	inch	mm	inch	mm	inch	bar	psi	bar	psi	mm
RE3021-03	5	3/16	5.0	0.20	13.6	0.54	415	6020	1660	24070	90
RE3021-04	6	1/4	6.5	0.26	15.4	0.61	400	5800	1600	23200	100
RE3021-05	8	5/16	8.0	0.31	16.9	0.67	350	5075	1400	20300	115
RE3021-06	10	3/8	9.5	0.37	19.2	0.76	330	4785	1320	19140	130
RE3021-08	12	1/2	12.7	0.50	22.3	0.88	275	3988	1100	15950	180
RE3021-10	16	5/8	15.8	0.62	25.7	1.01	250	3625	1000	14500	200
RE3021-12	19	3/4	19.0	0.75	29.6	1.17	215	3118	850	12325	240
RE3021-16	25	1	25.4	1.00	37.6	1.48	165	2393	650	9425	300
RE3021-20	31	1-1/4	32.0	1.26	47.0	1.85	125	1813	500	7250	420
RE3021-24	38	1-1/2	38.0	1.50	53.7	2.11	90	1305	360	5220	500
RE3021-32	51	2	51.0	2.01	66.7	2.63	80	1160	320	4640	630


合成橡胶内层，两层钢丝
编织增强层，合成橡胶外层

Synthetic rubber tube, double
wire braid reinforcement, and
synthetic rubber cover.


工作温度范围-40C°-100C°

Operating Temperature Range:
-40C°-100C°

推荐使用介质适于输送液压流体如醇、
液压油、燃油、润滑油、乳化液、烃等


Application:
fluid transfer, such as alcohols,
hydraulic oils, fuel, lubricating oils,
emulsified liquid, hydrocarbon, and etc.

联系大连捷瑞流体控制股份有限公司获取更多信息
For more information, please contact JIERUI


RE 3211

符合 EN857 1SC

Meets EN857 1SC

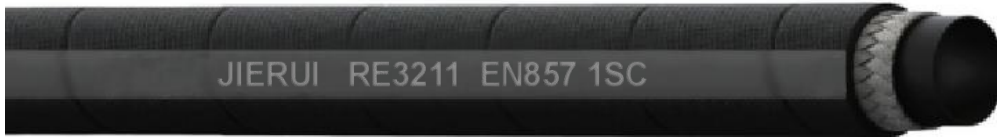

型号	公称通径		内径		外径		最大工作压力		爆破压力		最小弯曲半径
Part No.	DN	NB	I.D.		O.D.		Max.Working pressure		Min.Burst pressure		Min.bend radius
	mm	inch	mm	inch	mm	inch	bar	psi	bar	psi	mm
RE3211-04	6	1/4	6.5	0.26	13.5	0.53	225	3263	900	13050	75
RE3211-05	8	5/16	8	0.31	14.5	0.57	215	3118	860	12470	85
RE3211-06	10	3/8	9.5	0.37	16.9	0.67	180	2610	720	10440	90
RE3211-08	12	1/2	12.7	0.50	20.4	0.8	160	2320	640	9280	130
RE3211-10	16	5/8	15.8	0.62	23	0.91	130	1885	520	7540	150
RE3211-12	19	3/4	19.0	0.75	26.7	1.05	105	1523	420	6090	180
RE3211-16	25	1	25.4	1.00	34.9	1.37	88	1276	352	5104	230


合成橡胶内层，一层钢丝
编织增强层，合成橡胶外层

Synthetic rubber tube, single
wire braid reinforcement,
and synthetic rubber cover.


工作温度范围-40C°-100C°

Operating Temperature Range:
-40C°-100C°

推荐使用介质适于输送液压流体如醇、
液压油、燃油、润滑油、乳化液、烃等

Application:
fluid transfer, such as alcohols,
hydraulic oils, fuel, lubricating oils,
emulsified liquid, hydrocarbon, and etc.


联系大连捷瑞流体控制股份有限公司获取更多信息


For more information, please contact JIERUI



RE 3221

符合 EN857 2SC

Meets EN857 2SC

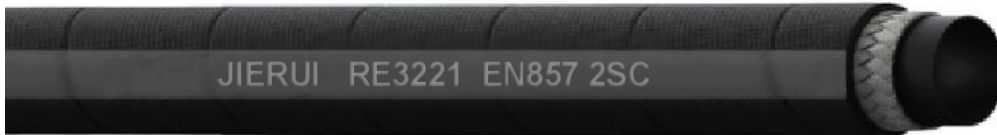

型号	公称通径		内径		外径		最大工作压力		爆破压力		最小弯曲半径
Part No.	DN	NB	I.D.		O.D.		Max.Working pressure		Min.Burst pressure		Min.bend radius
	mm	inch	mm	inch	mm	inch	bar	psi	bar	psi	mm
RE3221-04	6	1/4	6.5	0.26	14.2	0.56	400	5800	1600	23200	75
RE3221-05	8	5/16	8.0	0.31	16	0.63	350	5075	1400	20300	85
RE3221-06	10	3/8	9.5	0.37	18.3	0.72	330	4785	1320	19140	90
RE3221-08	12	1/2	12.7	0.50	21.5	0.85	275	3988	1100	15950	130
RE3221-10	16	5/8	15.8	0.62	24.7	0.97	250	3625	1000	14500	170
RE3221-12	19	3/4	19.0	0.75	28.6	1.13	215	3118	860	12470	200
RE3221-16	25	1	25.4	1.00	36.6	1.44	165	2393	660	9570	250



合成橡胶内层，两层钢丝
编织增强层，合成橡胶外层

Synthetic rubber tube, double
wire braid reinforcement, and
synthetic rubber cover.



工作温度范围-40C°-100C°

Operating Temperature Range:
-40C°-100C°



推荐使用介质适于输送液压流体如醇、
液压油、燃油、润滑油、乳化液、烃等

Application:
fluid transfer, such as alcohols,
hydraulic oils, fuel, lubricating oils,
emulsified liquid, hydrocarbon, and etc.



联系大连捷瑞流体控制股份有限公司获取更多信息
For more information, please contact JIERUI



JIERUI

高品质液压软管



符合国际通用标准

Meets international standards

RE 3041 EN 856 4SP

RE 3141 EN 856 4SH

RE 3131 EN 856 R13

RE 7151 SAE100 R15

软管重量更轻

Lighter in weight

产品尺寸稳定

Stable size

符合国际通用标准

Meets international standards



大连捷瑞流体控制股份有限公司
DALIAN JIERUI FLUID CONTROL CO.,LTD.

地址/Add: 中国大连市甘井子区辛萍街51号
NO.51 Xinping Street, Ganjingzi District, Dalian, China

电话/Tel: 0411-6600 7987

传真/Fax: 0411-8630 1511


<http://www.dljierui.com>



RE 3041

符合 EN856 4SP

Meets EN856 4SP

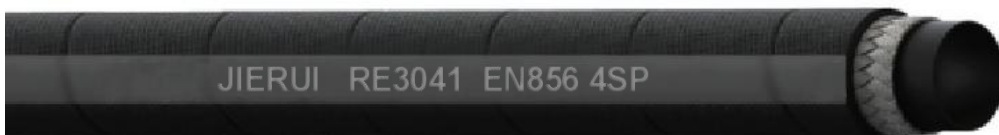

型号	公称通径		内径		外径		最大工作压力		爆破压力		最小弯曲半径
Part No.	DN mm	NB inch	I.D. mm inch		O.D. mm inch		Max.Working pressure bar psi		Min.Burst pressure bar psi		Min.bend radius mm
RE3041-04	6	1/4	6.4	0.25	17.6	0.69	450	6525	1800	26100	150
RE3041-06	10	3/8	9.5	0.37	20.6	0.81	445	6453	1780	25810	180
RE3041-08	12	1/2	12.7	0.50	23.8	0.94	415	6018	1660	24070	230
RE3041-10	16	5/8	15.8	0.62	27.4	1.08	350	5075	1400	20300	250
RE3041-12	19	3/4	18.8	0.74	31.4	1.24	350	5075	1400	20300	300
RE3041-16	25	1	25.4	1.00	38.5	1.52	280	4060	1120	16240	340
RE3041-20	31	1-1/4	31.8	1.25	49.2	1.94	210	3045	840	12180	460
RE3041-24	38	1-1/2	38.0	1.50	55.6	2.19	185	2683	740	10730	560
RE3041-32	51	2	50.6	1.99	68.8	2.71	165	2393	660	9570	660



合成橡胶内层，四层钢丝缠绕增强层，合成橡胶外层

Synthetic rubber tube 4-spiral wire reinforcement, and synthetic rubber cover.



工作温度范围-40C°-100C°

Operating Temperature Range:
-40C°-100C°



推荐使用介质适于输送液压流体如醇、液压油、燃油、润滑油、乳化液、烃等

Application:
fluid transfer, such as alcohols, hydraulic oils, fuel, lubricating oils, emulsified liquid, hydrocarbon, and etc.




联系大连捷瑞流体控制股份有限公司获取更多信息
For more information, please contact JIERUI



RE 3141

符合 EN856 4SH

Meets EN856 4SH

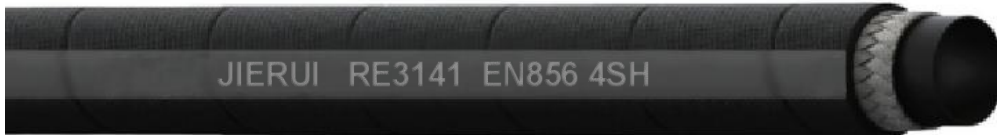

型号	公称通径		内径		外径		最大工作压力		爆破压力		最小弯曲半径
Part No.	DN	NB	I.D.		O.D.		Max.Working pressure		Min.Burst pressure		Min.bend radius
	mm	inch	mm	inch	mm	inch	bar	psi	bar	psi	mm
RE3141-12	19	3/4	19.1	0.75	31.4	1.24	420	6090	1680	24360	280
RE3141-16	25	1	25.4	1.00	38.1	1.50	380	5510	1520	22040	340
RE3141-20	31	1-1/4	32.0	1.26	45	1.77	325	4713	1300	18850	460
RE3141-24	38	1-1/2	38.2	1.50	52.2	2.06	290	4205	1160	16820	560
RE3141-32	51	2	50.6	1.99	66.7	2.63	250	3625	1000	14500	700



合成橡胶内层，四层钢丝缠绕增强层，合成橡胶外层

Synthetic rubber tube4-spiral wire reinforcement, and synthetic rubber cover.



工作温度范围-40C°-100C°

Operating Temperature Range:
-40C°-100C°



推荐使用介质适于输送液压流体如醇、液压油、燃油、润滑油、乳化液、烃等

Application:
fluid transfer, such as alcohols, hydraulic oils, fuel,lubricating oils, emulsified liquid, hydrocarbon, and etc.




联系大连捷瑞流体控制股份有限公司获取更多信息
For more information, please contact JIERUI



RE 3131

符合 EN856 R13

Meets EN856 R13

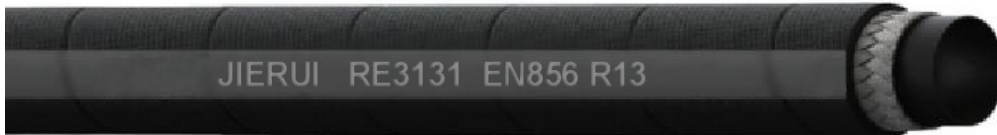

型号	公称口径		内径		外径		最大工作压力		爆破压力		最小弯曲半径
Part No.	DN mm	NB inch	I.D. mm	I.D. inch	O.D. mm	O.D. inch	Max.Working pressure bar	Max.Working pressure psi	Min.Burst pressure bar	Min.Burst pressure psi	Min.bend radius mm
RE3131-12	19	3/4	19.0	0.75	32.0	1.26	345	5003	1380	20010	240
RE3131-16	25	1	25.4	1.00	39.2	1.54	345	5003	1380	20010	300
RE3131-20	31	1-1/4	31.8	1.25	50.0	1.97	345	5003	1380	20010	420
RE3131-24	38	1-1/2	38.1	1.50	57.8	2.28	345	5003	1380	20010	500
RE3131-32	51	2	50.8	2.00	72.0	2.83	345	5003	1380	20010	630



合成橡胶内层，四-六层钢丝缠绕增强层，合成橡胶外层

Synthetic rubber tube4 or 6-spiral wire reinforcement, and synthetic rubber cover.



工作温度范围-40C°-120C°

Operating Temperature Range:
-40C°-120C°


推荐使用介质适于输送液压流体如醇、液压油、燃油、润滑油、乳化液、烃等

Application:
fluid transfer, such as alcohols, hydraulic oils, fuel,lubricating oils, emulsified liquid, hydrocarbon, and etc.


联系大连捷瑞流体控制股份有限公司获取更多信息

For more information, please contact JIERUI



RE 7151

符合 SAE100 R15

Meets SAE100 R15



型号	公称通径		内径		外径		最大工作压力		爆破压力		最小弯曲半径
Part No.	DN mm	NB inch	I.D. mm	I.D. inch	O.D. mm	O.D. inch	Max.Working pressure bar	psi	Min.Burst pressure bar	psi	Min.bend radius mm
RE7151-06	10	3/8	9.5	0.37	20.4	0.80	420	6090	1680	24360	150
RE7151-08	12	1/2	12.7	0.50	25.0	0.98	420	6090	1680	24360	200
RE7151-12	19	3/4	19.0	0.75	33.8	1.33	420	6090	1680	24360	265
RE7151-16	25	1	25.4	1.00	38.9	1.53	420	6090	1680	24360	330
RE7151-20	31	1-1/4	31.8	1.25	50.7	2.00	420	6090	1680	24360	445
RE7151-24	38	1-1/2	38.1	1.50	57.5	2.26	420	6090	1680	24360	530



合成橡胶内层，四-六层钢丝缠绕增强层，合成橡胶外层

Synthetic rubber tube 4 or 6-spiral wire reinforcement, and synthetic rubber cover.



工作温度范围-40C°-120C°

Operating Temperature Range:
-40C°-120C°


推荐使用介质适于输送液压流体如醇、液压油、燃油、润滑油、乳化液、烃等

Application:
fluid transfer, such as alcohols, hydraulic oils, fuel, lubricating oils, emulsified liquid, hydrocarbon, and etc.


联系大连捷瑞流体控制股份有限公司获取更多信息

For more information, please contact JIERUI

